

### PRODUCT SPECIFICATION

**PRODUCT NAME:** GenieMat FIS

**DESCRIPTION:** The **GenieMat FIS** is a flanking isolation system that consists of a fastener isolation bushing and a resilient isolation pad that work together to reduce flanking sound transmission from the building structure through a partition wall assembly. Both components are made primarily from 94% recycled rubber.


**APPLICATION:** Used in conjunction with wood, steel and concrete block partition walls to isolate both top and bottom sill plates.

- FEATURES AND BENEFITS:**
- Raised pedestal design for superior cushioning effect
  - Significantly reduces flanking sound transmission
  - Mold, bacteria, fungi, and water resistant
  - Can contribute to LEED<sup>®</sup> points
  - Can be used for a wide range of loadings
  - Continuous resilient support of partitions

**GENIEMAT FIS DIMENSION:**  
Available Widths: 83 mm (3 1/4"), 140 mm (5 1/2") (custom widths available)  
Available Thicknesses: nom. 5 mm (3/16"), nom. 10 mm (3/8")  
Roll Lengths: 4.57 m (15') for 10 mm (3/8") and 9.14 m (30') for 5 mm (3/16")

**GENIEMAT FISW (WASHER) DIMENSION:**  
Outer Diameter: 37 mm (1 7/16")  
Inner Diameter: 6 mm (1/4")  
Overall Thickness: 13 mm (1/2")

**LEAD TIME:** 2-3 weeks after receipt of order

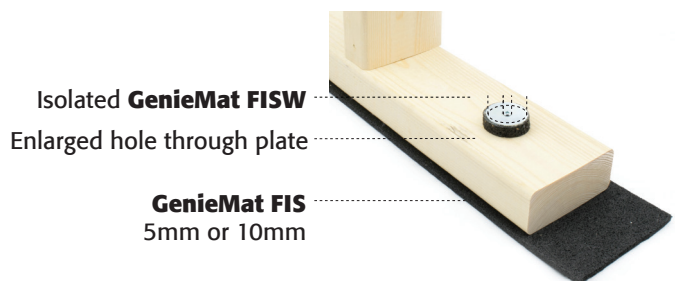

## CONTACT Us

For Your Project Specific Questions

**Middle East** +971 4 813 5501 | **UK** +44 203 9846444 | **Asia Pacific** +65 8452 6865

**E.** [info@pliteq.ae](mailto:info@pliteq.ae)

© Pliteq Building Materials Trading LLC. 2019.

10.019  
®™ Trademarks of Pliteq Inc. The information provided is accurate to the best of our knowledge at the time of issue. However, we reserve the right to make changes when necessary without further notification. Suggested application may need to be modified to conform with local building codes and conditions. We cannot accept responsibility for products that are not used, or installed, to our specifications. All listed dimensions are nominal.

