

GENIEMAT[®] RST12

SOUND CONTROL UNDERLAYMENT



PRODUCT SPECIFICATION

PRODUCT NAME:	GenieMat RST12
DESCRIPTION:	Robust reduced sound transmission mat made from 94% recycled rubber content used when superior sound control is required in multifamily housing, high-rises, or commercial buildings.
APPLICATION:	Flat, resilient underlayment that is used directly under a variety of floor finishes in wood, steel, and concrete construction, yielding exceptional results for impact sound insulation.
FEATURES AND BENEFITS:	<ul style="list-style-type: none">• Significantly reduces impact sound• Mold, bacteria, fungi, and water resistant• Qualifies for LEED[®] points• Can be installed directly under hard surface or resilient floor coverings• FloorScore[®] certified
DIMENSION:	Rollgood: 1.2 m wide, 4.6 m long (4' wide, 15' long)
THICKNESS:	nom. 12 mm (1/2")
ROLL WEIGHT:	68.9 kg/roll (152 lb/roll)
ROLL AREA:	5.6 m ² (60 ft ²)
ROLLS/PALLET:	12
LEAD TIME:	2-3 weeks after receipt of order

TECHNICAL DATA

SHEET WEIGHT:	12.3 kg/m ² (2.53 lb/ft ²)
ROBINSON WHEEL TILE TEST: (ASTM C627)	Light commercial with tile

CONTACT Us

For Your Project Specific Questions
Middle East +971 4 813 5501 | **UK** +44 203 9846444 | **Asia Pacific** +65 8452 6865
E. info@pliteq.ae

© Pliteq Building Materials Trading LLC. 2019.
^{11.19} [®] Trademarks of Pliteq Inc. The information provided is accurate to the best of our knowledge at the time of issue. However, we reserve the right to make changes when necessary without further notification. Suggested application may need to be modified to conform with local building codes and conditions. We cannot accept responsibility for products that are not used, or installed, to our specifications. All listed dimensions are nominal.



www.pliteq.ae

GENIEMAT[®] RST12


SOUND CONTROL UNDERLAYMENT



TECHNICAL DATA CONTINUED

VOC EMISSIONS:
(ASTM 5116) Meets requirements for the California Department of Public Health Criteria

TEMPERATURE STABILITY: -40°C to +115°C (-40°F to +240°F)

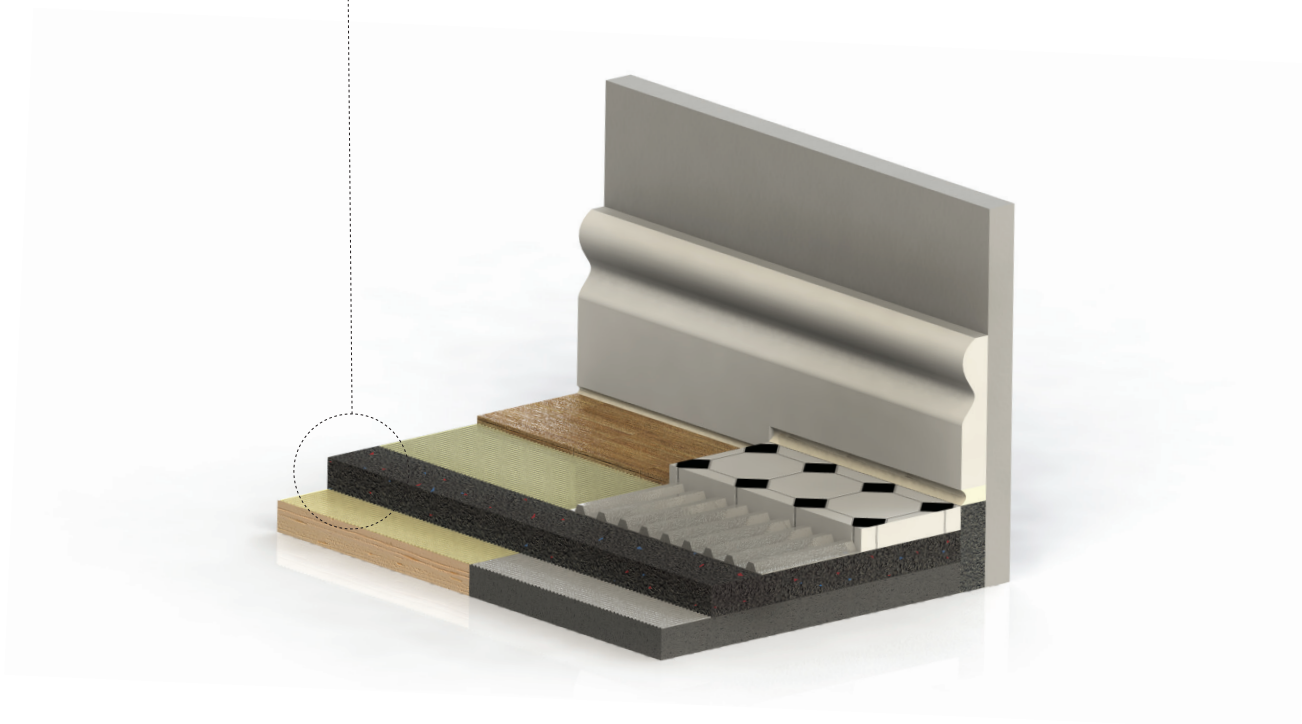

CONTACT Us

For Your Project Specific Questions

Middle East +971 4 813 5501 | **UK** +44 203 9846444 | **Asia Pacific** +65 8452 6865

E. info@pliteq.ae

© Pliteq Building Materials Trading LLC. 2019.

^{11.19} [®]™ Trademarks of Pliteq Inc. The information provided is accurate to the best of our knowledge at the time of issue. However, we reserve the right to make changes when necessary without further notification. Suggested application may need to be modified to conform with local building codes and conditions. We cannot accept responsibility for products that are not used, or installed, to our specifications. All listed dimensions are nominal.



www.pliteq.ae